



JAYUSOLAR

Maximum Efficiency
20.93%

Output Power
425-455W

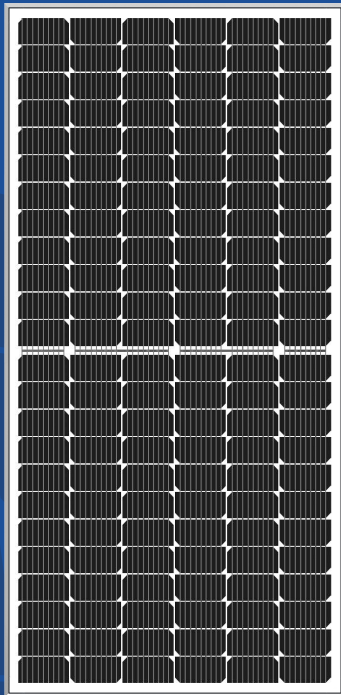

Linear Performance Warranty

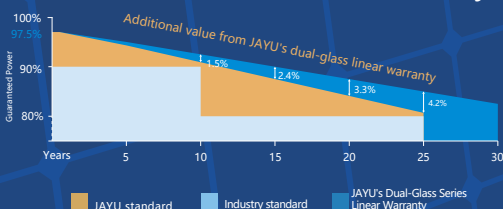


JY425-455M6-AFae-9 HALF-CELL BIFACIAL MONO 166PERC 144CELL DUAL GLASS SOLAR MODULE

Features

- Large Size Cell and Multi Grid Battery Technology: higher output power, effectively reduce the cost of single watt system;
- Half-cut Cell Technology: New circuit design, Lower internal current, Lower resistance loss;
- Dual Glass Design: Good heat dissipation to improve power generation;
- Improved Durability and Reliability: Extreme resistance to corrosions caused by moisture, ammonia, sand, salt mist, acid, alkali, etc;
- Fire Safety Class A: Excellent fire resistance, be suitable for rooftop system;
- Significantly Lower the Risk of Hot Spot: Reduce power loss, Increase module output power.

Engineering Drawings

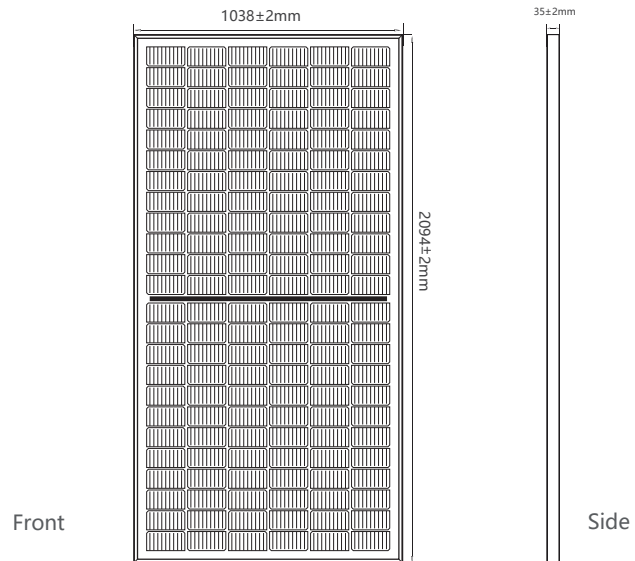

Mechanical Characteristics

Cell Type	Mono Perc 166×166mm
Number of cells	144 (12×12)
Dimensions	2094×1038×35mm
Weight	27.5kg
Front Glass	Coated tempered glass
Backsheet	Tempered Glass
Frame Material	Anodized Aluminium Alloy
Fire Safety Class	Class A
Junction Box	IP67, 3 Diodes
Connector	MC4 Compatible
Cables	PV1-F 4MM ²
Encapsulant Material	EVA

Electrical Characteristics(STC)

Maximum Power-PMAX (Wp)	425	430	435	440	445	450	455
Output Power Tolerance	0~+5Wp						
Optimum Operating Voltage(Vmp)(V)	40.5	40.7	40.9	41.1	41.3	41.5	41.7
Optimum Operating Current(Imp)(A)	10.50	10.57	10.64	10.71	10.78	10.85	10.92
Open Circuit Voltage (Voc) (V)	48.3	48.5	48.7	48.9	49.1	49.3	49.5
Short Circuit Current (Isc) (A)	11.23	11.31	11.39	11.46	11.53	11.60	11.66
Module Efficiency (%)	19.55%	19.78%	20.01%	20.24%	20.47%	20.70%	20.93%

STC: Irradiance of 1000 W/m², AM=1.5, module temperature of 25 °C

Electrical Characteristics(NOCT)

Maximum Power-PMAX (Wp)	317	321	325	329	332	336	340
Optimum Operating Voltage(Vmp)(V)	37.7	37.9	38.1	38.3	38.5	38.6	38.8
Optimum Operating Current(Imp)(A)	8.42	8.47	8.53	8.59	8.64	8.70	8.75
Open Circuit Voltage (Voc) (V)	45.3	45.5	45.7	45.8	46.0	46.2	46.4
Short Circuit Current (Isc) (A)	9.08	9.15	9.21	9.27	9.33	9.38	9.43

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

Temperature Ratings

NOCT(Nominal Module Operating Temperature)	45°C (±2°C)
Temperature Coefficient of PMAX	-0.40%/°C
Temperature Coefficient of VOC	-0.32%/°C
Temperature Coefficient of ISC	+0.05%/°C

Maximum Ratings

Operational Temperature	-40°C ~ 85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	20A

Do not connect Fuse in Combiner Box with two or more strings in parallel connection

Certificates


TüV, CQC, CE

Packaging Configuration


Container	40'HQ	20'GP
Piece per Pallet	30	
Pallet per Container	22	5
Piece per Container	660	150



Current-Voltage & Power-Voltage Curve(450W)

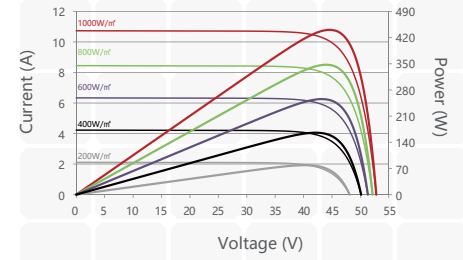

Temperature Dependence of Isc, Voc, Pmax

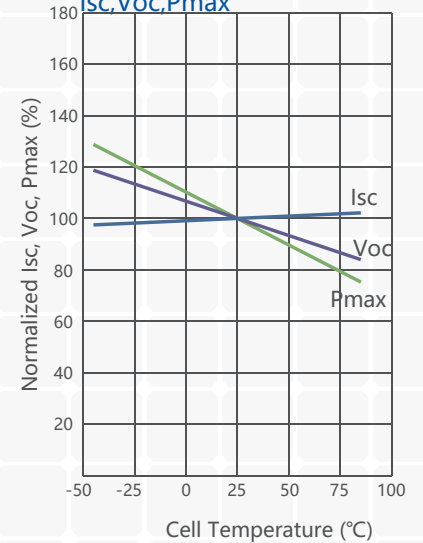

Xuzhou Jayu Solar Energy Technology Co., Ltd.

Add: Peixian Economic Development Zone, XuzhouCity, Jiangsu Province, China
 Tel: +86-(0)516-67060055 +86-13151232006
 Web: www.jayusolar.com
 E-mail:sales@jayusolar.com